


Shouldered Ends


Butt Weld

PE100 Black

SDR Rating to be specified

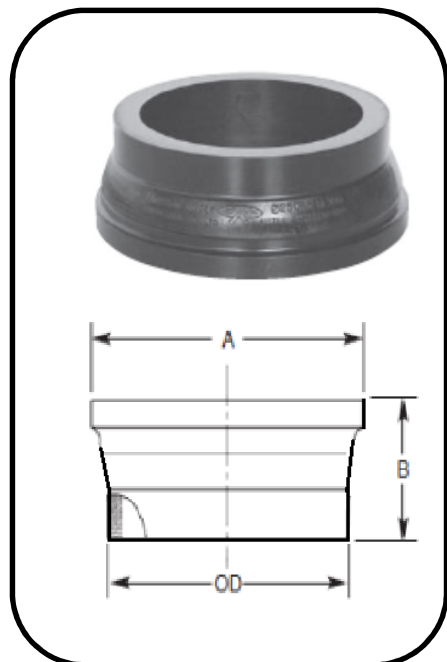

Pipe Size	A	B	Coupling Size inch
63	68	55	2-3/8
75	97	70	3-1/2
90	97	85	3-1/2
110	122	85	4-1/2
125	176	80	6-1/2
140	176	80	6-1/2
160	176	85	6-1/2
200	235	90	8-5/8
225	235	90	8-5/8
250	287	95	10-3/4
280	338	105	12-3/4
315	338	95	12-3/4
355	370	100	14
400	420	100	16

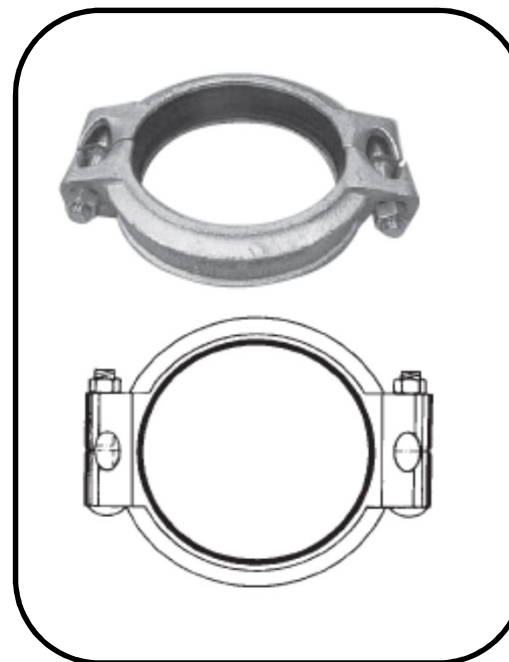

Poly Pipe Size	Coupling size inch
63	2-3/8
75	3-1/2
90	3-1/2
110	4-1/2
125	6-1/2
140	6-1/2
160	6-1/2
200	8-5/8
225	8-5/8
250	10-3/4
280	12-3/4
315	12-3/4
355	14
400	16

Poly Shouldered Ends and Couplings

This is a highly effective pipe joint, using two identical half housings to fully enclose a specially designed lip seal gasket and lock behind a raised shoulder formed on the poly weld on end, providing the joint with end-load bearing capabilities. During assembly the seal lip is fitted over the shoulder. The housing compresses the gasket and internal pressure reinforces the sealing.

Bolted Couplings

Material: SG iron . Bolts & Nuts: Metric; grade 4.6 to AS1112.

