



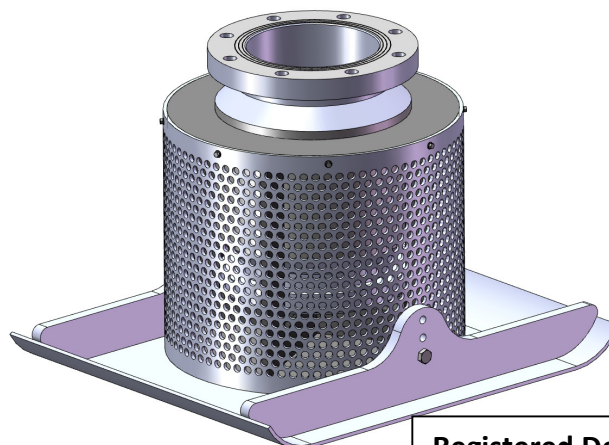

Poly Foot Valve

Features

- **Body Constructed from tough HDPE**
- **Electro-polished Stainless steel hinge assembly**
- **Draw down inlet**
- **Anti-vortex vanes**
- **10 times inlet open screen area**
- **Sizes range from 100mm to 300mm**
- **Flange & Backing Ring AS4087 / T/D compatible**

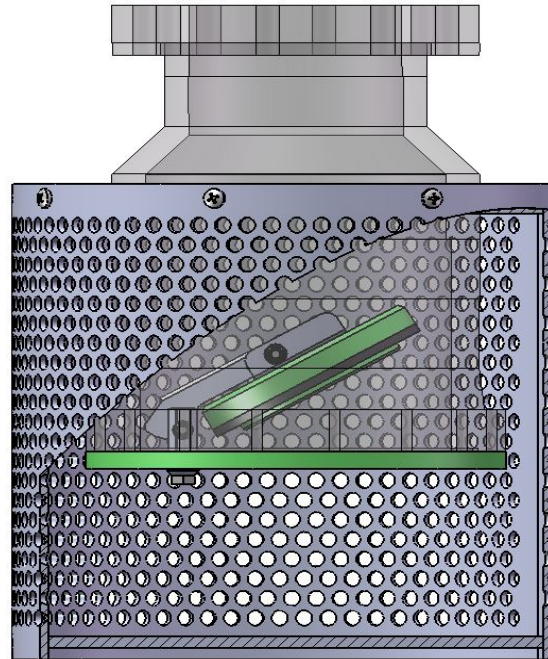

*Showing
optional Skid
Base for
protection of
dam liners*

Registered Design No 14258/2014

JAG Poly Pty Ltd
Unit 6/272 Lavarack Ave
Pinkenba QLD 4008
Australia
Phone: +61(7)32602225
Fax: +61(7) 32602228
Email: enquiries@jagpoly.com.au






Poly Foot Valve

Dimension Sheet

The design of this new poly foot valve means a more trouble free service with a huge screen area to reduce trash build up.

There are no welded metal parts to cause corrosion points. Valve seat and flap are from G10 high tensile strength resin material.

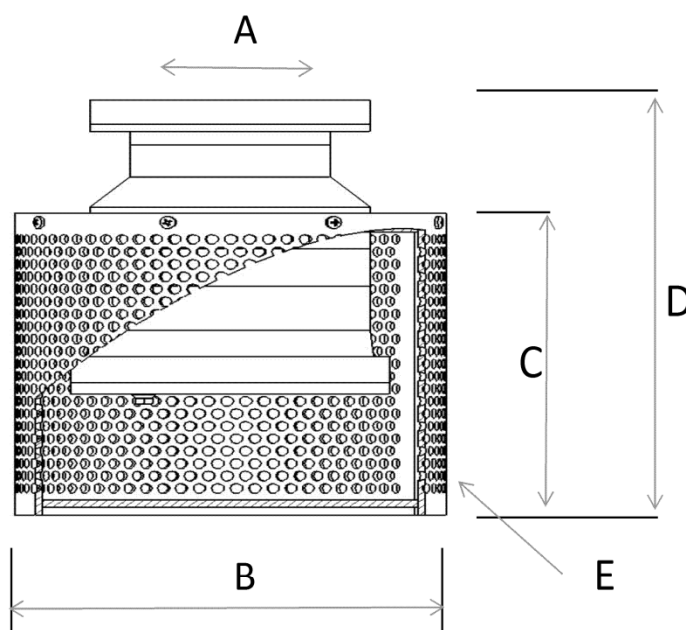

Nom. Size	Screen Dia.	Screen length	Overall length	Screen Hole Size
A	B	C	D	E
100	360	245	395	13
125	410	370	510	13
150	480	370	490	13
200	630	370	520	13
250	630	495	620	13 or 20
300	795	555	700	20
350	TBA	-	-	-
400	TBA	-	-	-
450	TBA	-	-	-

JAG Poly Pty Ltd
Unit 6/272 Lavarack Ave
Pinkenba QLD 4008
Australia
Phone: +61(7)32602225
Fax: +61(7) 32602228
Email: enquiries@jagpoly.com.au

